



PNEUMATIC NAILING MACHINES

CN55 - Nail Size - 1"=2 1/4"

CN70 - Nail Size - 1 3/4"=2 3/4"

CN90 - Nail Size - 2"=3 1/2"

C38/130 - Nail Size - 3"=5 1/4"

* All Nail Coils Sizes Available



PNEUMATIC STAPLING MACHINES

MODEL - 8016

FOR STAPLE PIN SIZE - 12.7 x 06-16mm

* All sizes of Staple Pins available



Stapler - QLU-2538

For Wood/ Plywood / Heavy Corrugate Board
stapling, Staple pin size-25mm Crown and
Height - 16 to 38mm

Staple pin Thickness=1.6 x 1.4 mm



CORRUGATE STAPLER MACHINE Air Operated

For Corrugate Box Top & Bottom Closing By
Staple Pin 35x18/22mm



CORRUGATE STAPLER MACHINE Manual Hand Operated

For Corrugate Box Top & Bottom Closing By
Staple Pin - 35x18/22mm



PEDAL OPERATED TRAY MAKING STAPLER

Staple Pin - 35 x 18-22mm

Application : Corrugated Tray Making,
Corner Stapling, etc.



QSP-50 Series Stapler For Corrugate box

Stapler With Staple pin Bending attachment for
Corrugate box stapling



P-330

PP, PET, CORD STRAP HAND TOOL

Lightweight & Economical Tensioner with
oil less bearings in handle and base.
For 12mm to 19mm PP & PET strapping



P-482 / P-452

Large Heavy duty Zinc Die casting base
and aluminum handle
for 19mm to 50mm PET/CORD STRAP



P-353

Tensioner with nose function for 12-19mm
PP, PET, and cord strapping.
Ideal for round/Flat Surface



PH 350

Heavy Duty Windlass Tensioner Extra Heavy
Duty Industrial Grade.19mm to 50mm
Composite Strap & Woven Lashing Strap




C-5004/C 5005/C 5015 (Off - Set Type)

High Quality Long Handle(17") PET strapping sealer
all metal parts are heat treated

C-5004 for 12 mm PET strap -for GP12 Gripper seal

C-5005 for 15 mm PET strap -for GP15 Gripper seal

C-5006 for 19mm PET strap



QV-19 (Air Optd. PET Strapping Machine)

Automatic tensioning, Sealing & Cutting-all in one

Air operated PP/PET Friction weld strapping tool

Max Strap Tension=2700N, Strap width=12-19mm

Strap Thickness=0.5- 1.27mm

Maintenance Free / Economical Tool Low Spares Cost



Battery powered ZP-22/ZP-26/ZP-93

Automatic tensioning, Sealing & Cutting-all in one

ZP 22 Standard Tension - 2000 N

ZP26 High Tension-3300 N, Strap Width : 12, 15& 19mm

Strap Thickness : 0.6mm -1.27mm

Brushless Motor and Smart ECS

MUL-16/20



STEEL STRAP COMBINATION TOOL

Heavy Duty Sealless steel strapping tool.

Straps gauge range from 0.015" ~ 0.027".

One tool works for 1/2", 5/8", and 3/4".

Tensioning, sealing and cutting - all in one.



S-296

Heavy Duty High Tensile Feedwheel Tensioner for 12mm to 19mm (thickness upto 0.90mm)



S-249 / S-298

S-249 -19mm to 32mm X 1.27mm Max. Steel Strapping.
Pusher Feedwheel Tensioner
S-298 -19mm to 32mm X 0.90mm Max. Use
With Closed Seal Or Wing Seal When Applying Steel Straps.
Made In Taiwan



C-3104 / 05 / 06 - Steel Strapping Sealer.
All Metal Parts are Heat-Treated
C 3104 - 12mm Strap
C 3105 - 15mm Strap
C 3106 - 19mm Strap



C-3160 (19mm) / C-3180 (32mm)

Double notched side action steel strapping sealer with aluminum pipe handle. (Handle length 25.5")
Use with CS20/CS21/CS22 closed seal.
Made In Taiwan



H 410 - Heavy Duty Cutter

High carbon steel drop forged strap cutter for straps up to 2" x 0.05". Blade can be reverse when dull. For 12mm To 50mm



H-300 CUTTER

High carbon steel lost wax casting strap cutter for straps up to 2" x 0.035" (12mm to 32mm).



STTR 19-25-32
(Air Tensioner)

Pneumatic Tensioner (Flat and Round Surfaces)
Strap Width : 19-25-32mm
Strap Thickness : from 0.6-1.1mm
Max Tension : 9000 N /2000lbs
Weight : around 4.2kg/ 9.2lab



STP 19-25-32
(Air Sealer)

Pneumatic Sealer with Seal -Single Notch
Strap width-19-25-32mm
Strap Thickness : from 0.6-1.1mm
Seal Type : Seal Single / Double Notch
Air Pressure : From 5 -6.5barmax / 72-92psi
Weight : @ 3.8kgs/8.3 lbs



STSR-32 HT
(Air Combination Tool)

Pneumatic Sealer with Seal -Double Notch
Strap width-19-25-32mm
Strap Thickness : from 0.6-1.1mm
Tensioning, sealing and cutting - all in one
Air Pressure : From 5 -6.5barmax / 72-92psi
Weight : @ 9.5kg

S-300
TENSIONER
(Steel Strap)




Size : 19mm To 32mm • Thickness : 1.10mm Maximum
Specification: Heavy Duty Windlass Tensioner
Made In Taiwan

Semi Automatic
Strapping Machine
(PP Strap)




Maximum Tension-50kgs/max
Heavy Duty machine-1.5mm SS Top
Strap Width : 06mm, 09mm, 12mm& 15mm
Strap Cycle Speed : 2.5sec/strap
Dimensions : 895mm (L) x 565mm (W) x 730mm (H)
Power : 240v, 50/60Hz -01 Phase



Fully Automatic
Strapping Machine

Strap Width : 6-15mm, Strap Tension : 70kg/max
Strap Cycle speed : 2.4 sec/strap
Dimension : 1445mm(L)x 600mm(W)x 1740mm(H)

Cartoon Sealing
Machine



Tape Width: 1 1/2", 2", Belt Speed : 23m/minute
Box Size (L)120mm-(W)110mm-500mm-(H)120mm-500mm
Top & Bottom Taping



Semi Auto L-Sealer + Shrink Tunnel

Pallet Stretch Wrapping Machine :

Semi Automatic / Fully Automatic
Max wrapping height-02m
Max Turntable Speed-12rpm
Max Loading Weight-1650kg
Turntable Diameter-1.5m



Chamber Type Shrink Wrapping Machine

Steel Strap / PET
Strap Dispenser



PACKAGING CONSUMABLES




Air Pouch Machine



Paper Packaging Machine



Edge & Core Protector

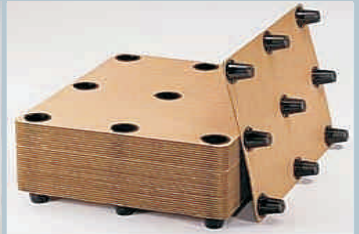


Corrugated Pallets For Export



Aluminum- Foil Bag



VCI Paper Roll, VCI-Bag-Plastic




Dunnage Air Bag




Plastic Pallets



Chip Wood Blocks for Pallet

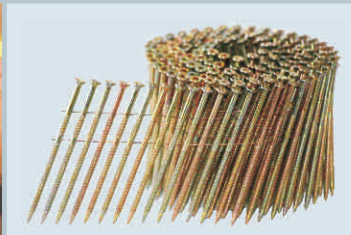

Coil-Nail

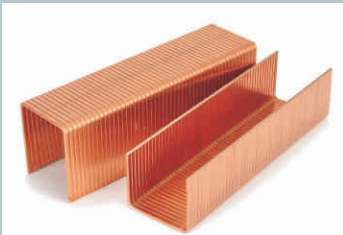

Corrugated-Staple Pins



Plastic Corner Edge Protector



Strapping Dispensers




Polyester Pet Strapping Rolls



PET Strap Clip



Cord-strap Roll & Buckles



Stretch Film Dispenser



stretch film dispenser



Stretch Wrapping Film



Tape Dispenser



Foldable Plastic containers



Protective Mesh Sleeve



Bag Sealing Machine



BOPP Self Adhesive Tape



Industrial Robot Covers





Dustproof PVC Covers For Racks



Corrugate Boxes



PP corrugate Sheets

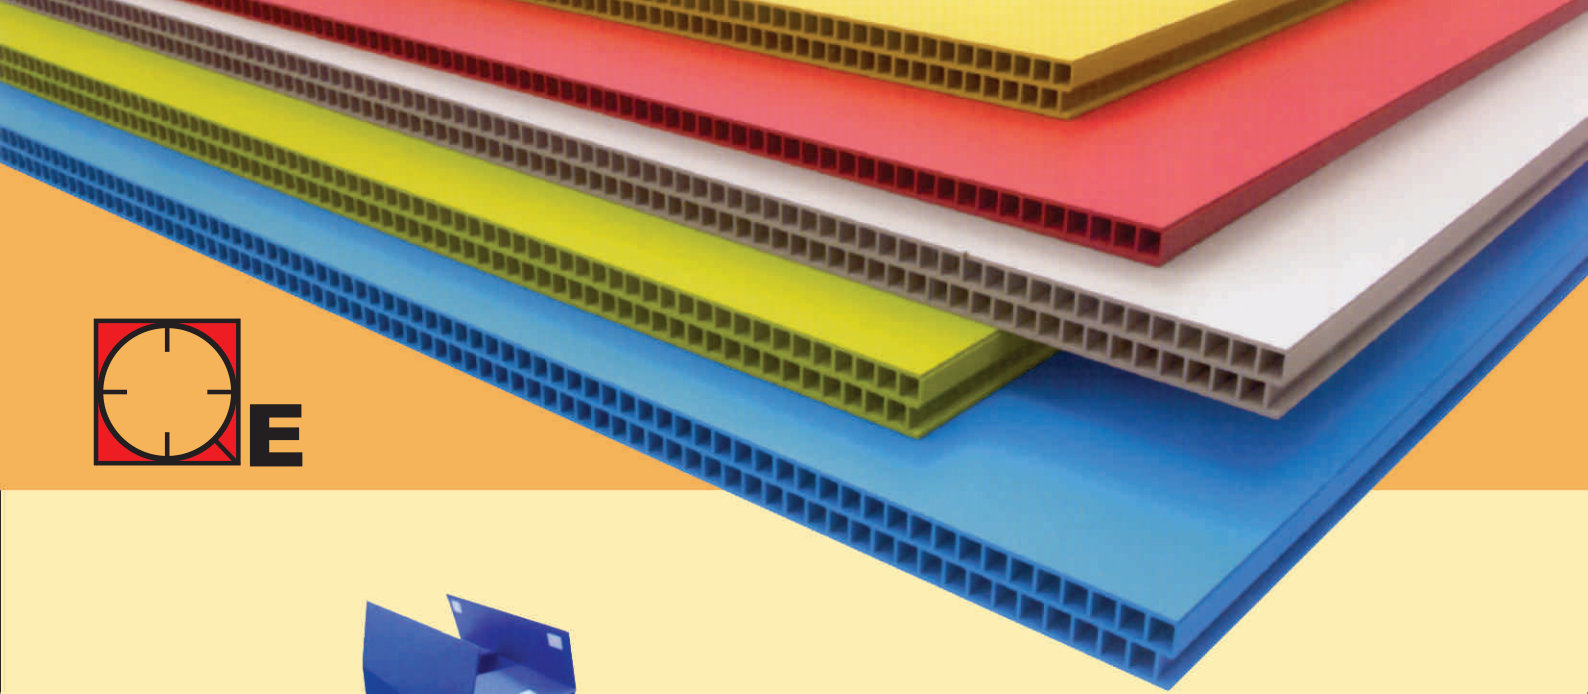

CORRBOX is a 3 ply and specially 5 ply product. It is strong and durable for reusable. It is printable and can be creased, cut and joints easily to make packaging boxes, fabricated with hook-loop, handles and extra corners reinforcement for stacking and convenience to reuse 10-50 times compare to paper board cartons. Its available width is 5 feet & length 6 to 8 feet and size customizable. Thickness from 2 mm to 8 mm in 275 gsm to 1500 gsm

Feature


- Reusable box
- Water resistant
- Weather resistant
- Strong and long life
- Chemical resistant
- It Can be joint, creased, cut & printable



STAGGUARD is a 5 ply product, it can be use for various industries like automobile, construction, food, chemical & pharmaceutical industries and all type of packaging industries, heavy partitions and used instead of ply woods. Plastic sheets available in width 5 feet & length 8 feet, and size customizable. Thickness from 5 mm to 15 mm in 750 gsm to 4000 gsm.

Feature

- 5 ply product
- Heavy partition
- Box making
- Can be replace Plywood also

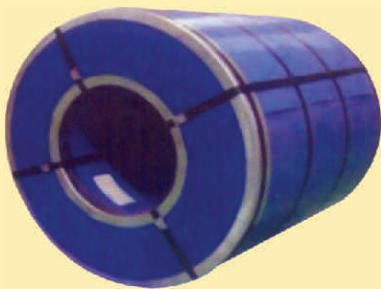

SAFFGUARD is a 3 ply product, can be used generally anywhere. Used for Advertising, packaging, floor protection, Shuttering plate protection in building construction industry. Available colors are Yellow, Silver, Blue, White, Black and Grey. Plastic corrugated sheets available in width 5 feet & length 8 feet, and size customizable. Thickness from 2 mm to 5 mm in 275 gsm to 1500 gsm.

Feature

- 3 ply product
- Floor protection
- Advertising and Packaging use
- General use
- Shuttering plate protection .Construction use



GLASSTICK is a 5 ply product .It is used for decorative partitions, windows for furniture and to build green houses. Any light can pass through it and available in wide range of transparent colors with UV protected. Its available in 5 feet width & 8 feet length and size customizable. Thickness from 3 mm to 8 mm in 500 gsm to 2500 gsm.

Feature

- UV protected
- Greenhouse use
- Decorative partition
- Available in wide range of colors .50% sunlight can pass through it

12-A, Sumati Laxman Apt., 306, Kasba Peth,
Pune - 411 011. (MS)INDIA
Mobile : 9960066888
Email : qualisengg@gmail.com
www.qualisengineers.com



QUALIS ENGINEERS

Industrial Goods, Packaging Tools & Consumables
Packaging Design & Consultancy